



**PVC Insulated**  
Flat Ribbon Wires

Application : For internal wiring of appliances

**UL 2468 / CSA AWM I A/B**



Rating : 80°C, 300V

Flame test : UL VW - 1  
 : CSA FT1  
 : JQA F - Mark

Construction :

Conductor - Each conductor is made up of plain annealed copper wires. Two conductor laid parallel in one plane.

Insulation - Heat - resistant PVC insulation

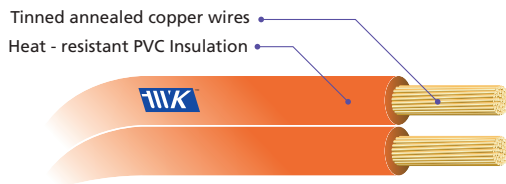

No. of Core	Conductor			Nominal Insulation Thickness	Overall Diameter	Maximum Conductor Resistance at 20°C	Standard Length	
	Size	Stranding	Diameter				m/coil	ft/coil
No.	AWG	No. / mm	mm	mm	mm	ohm/km	m/coil	ft/coil
2	24	11 / 0.16	0.61	0.38	1.52 x 3.04	93.25	610	2000
2	22	17 / 0.16	0.76	0.38	1.66 x 3.32	55.0	610	2000
2	20	21 / 0.18	0.95	0.38	1.83 x 3.66	34.6	610	2000
2	18	34 / 0.18	1.21	0.38	2.10 x 4.20	21.8	610	2000